


RESION Epoxy Floor Coating

The RESION Epoxy floor coating is a thin layer of approximately 0.5 mm that is easily applied with a roller. The coating protects the substrate against heavy loads, chemicals, and wear, making it an excellent and economical alternative to a resin floor on a substrate that is already relatively flat. This floor coating is ideal for garages, warehouses, and workshops.

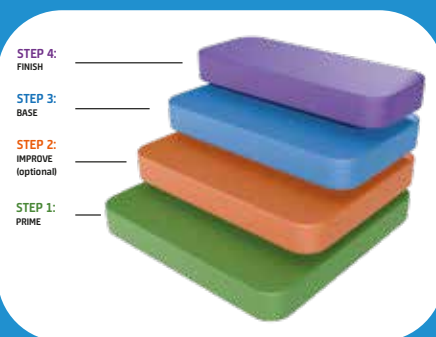

PROPERTIES

- Thickness: approximately 0.5 mm
- Easy to apply
- Resistant to acids and chemicals
- Low-maintenance
- More cost-effective than a epoxy cast floor

Product	Description	Consumption
STAP 1: PRIME		



EP Floor Primer SF

Primer for porous substrates

300 g/m²



EP Floor Primer WB

Primer for non-porous substrates

100-150 g/m²

STAP 2: IMPROVE (optional)



EP Scratch Coat

Epoxy scratch coat

1-3 kg/m²



EP Leveling

Epoxy leveling mortar

1,5-4,5 kg/m²

STAP 3: BASE



EP Floor Coat

Epoxy coating floor

500-700 g/m²

STAP 4: FINISH



Floor Finish Matt

Polyurethane topcoat with matte finish

80 g/m²



TyreProof Finish

Plasticizer-resistant polyurethane topcoat with matte finish

125-150 g/m²

APPLICATIONS



Garages



Workshops



Residential areas

COLORS

Available in any RAL color, custom-made for you.



COLOURS